


PT-SERIES

Premium Polyethylene Water Tank Trailers

ENGINEERED FOR AUSTRALIAN CONDITIONS

Allquip's trailer-mounted water modules are built for mobility and ease of use. Designed for industries needing efficient transport of water without a dedicated truck, they are a cost-effective and practical choice.

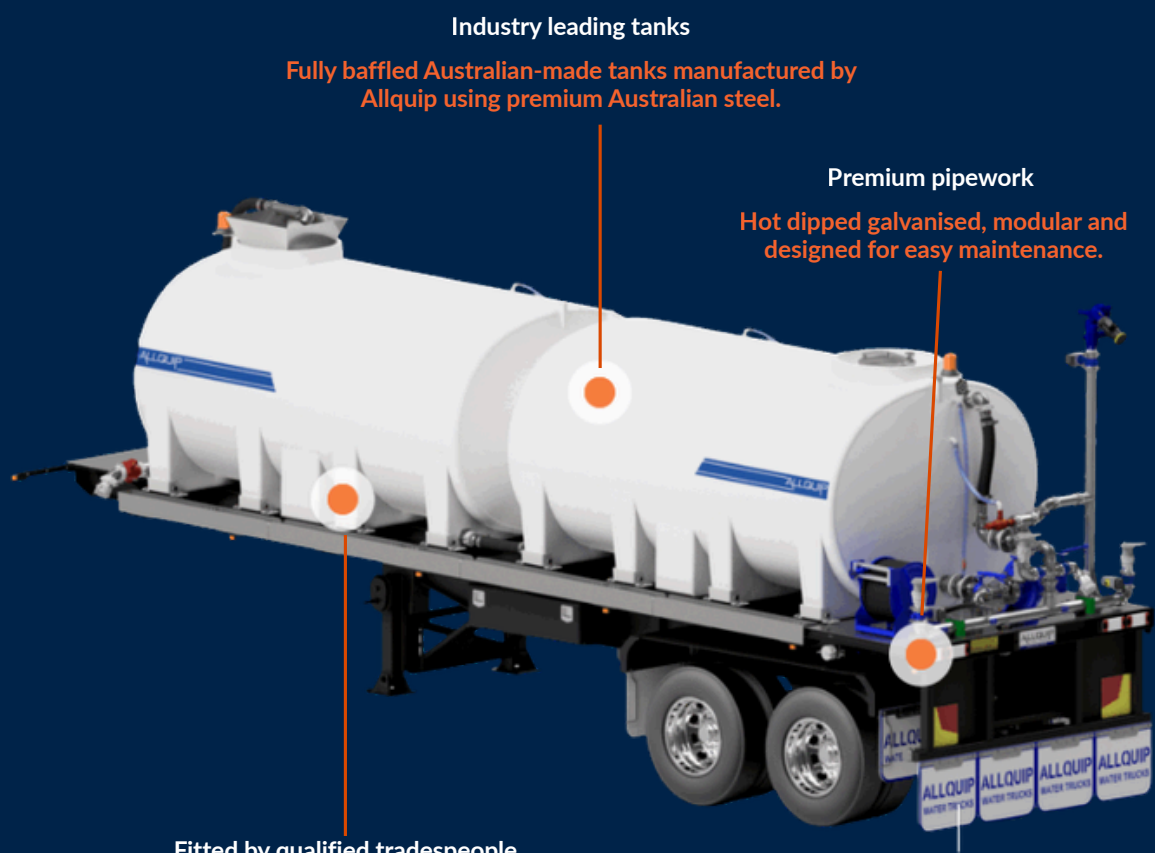

Industry leading tanks

Fully baffled Australian-made tanks manufactured by Allquip using premium Australian steel.

Premium pipework

Hot dipped galvanised, modular and designed for easy maintenance.

Fitted by qualified tradespeople

Our team are fully qualified body fitters, electricians, painters and experts in water trucks.



TRAILER SPECS

MODEL	PT-11000 Dog Trailer
CHASSIS	Fully Fabricated 16mm Top Flange & 20mm Bottom Flange
DRAW BAR	A-frame Heavy-duty steel construction
TOWING EYE	50 mm towing eye
AXLES	2 x FUWA Hitch 20" Drum Brakes 10/285 PCD Long Studs
SUSPENSION	FUWA K Hitch 1232mm Bogie-Axle Overslung Spring 9 Leaf
RIDE HEIGHT	385mm
OUTER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD
INNER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD

TYRES	9 x 275/70R x 22.5"
MUDGUARD	2 x Conveyer Rubber Guards
COATING	Fully Sandblasted with Polyzinc Undercoat & Powder Coat Topcoat
COLOR	Black
LIGHTS	LED Hella Trailer Light Kit
TOOLBOX	1200mm x 450mm x 380mm
SPARE WHEEL	Semi Trailer Swing Type
LANDING JACK	Butler Side Wind Implement Jack
COUPLING	Off-Road Recovery Coupling at Rear

TANK

MATERIAL	UV - Stablised Polyethylene Also available in Aluminium
MAX. CAPACITY	1 x 11000L Polyethylene Tank
BAFFLE SYSTEM	Ball-Baffle System, BBS Tested and Approved by Loadsafe Australia 1 Ball Every 40 Litres
TANK FINISH	Lightweight, Increased Payload Food Grade Poly Corrosion Resistant Flex and Impact Resistant
TANK FEATURES	15-Year Tank Warranty Heavy Duty Tank Mounts Low Profile Tank Design Water Level Sight Gauge

ELECTRICAL SYSTEM

HARNESS AND WIRING	Marine Grade MDG15 Harness Compliant Braiding
CONTROLS	Individually Programmed 16 Channel Remote Control
POWER	Battery with Individual Battery Lockout Isolator
LIGHTING	Hella LED Lights Rear Beacon

WATER SPRAY SYSTEM

BATTERY SPRAYS	2 x 80mm (3") Left And Right Rear 1 x 80mm (3") Center Rear
SPRAY BAR	Pressure Fed V-jet Bar With 14 Brass V-Jet Nozzles With End Caps
HOSE REEL	Heavy Duty Manual Rewind Hose Reel
OUTLETS	1 x 80mm (3") Pump Outlet 1 x Garden Tap Outlet
TANK-FILL	1 x 80mm (3) Pump with One-Way Swing Check Value
ACTUATORS	Electric Over Air with Spring Return Close Valves Air Connection Required

WATER PUMP AND DRIVE SYSTEM

MODEL	Heavy Duty Self Priming GMP Pump
PERFORMANCE	1,800 LPM @ 65 PSI with 45 Metre Head
ENGINE	Honda Petrol 13HP Electric Start Engine
DRIVE SYSTEM	Direct Coupled Mechanical Drive

TRAILER DIMENSIONS

CAPACITY	WHEELBASE	GVM	TARE WEIGHT	LENGTH	WIDTH	HEIGHT
11,000 litres	mm	15,000kg	kg	mm	mm	mm



TRAILER SPECS

MODEL	PT-14000 Dog Trailer
CHASSIS	Fully Fabricated 16mm Top Flange & 20mm Bottom Flange
DRAW BAR	A-frame Heavy-duty steel construction
TOWING EYE	50 mm towing eye
AXLES	3 x FUWA Hitch 20" Drum Brakes 10/285 PCD Long Studs
SUSPENSION	FUWA K Hitch 1232mm Bogie-Axle Overslung Spring 9 Leaf
RIDE HEIGHT	385mm
OUTER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD
INNER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD

TYRES	9 x 275/70R x 22.5"
MUDGUARD	2 x Conveyer Rubber Guards
COATING	Fully Sandblasted with Polyzinc Undercoat & Powder Coat Topcoat
COLOR	Black
LIGHTS	LED Hella Trailer Light Kit
TOOLBOX	1200mm x 450mm x 380mm
SPARE WHEEL	Semi Trailer Swing Type
LANDING JACK	Butler Side Wind Implement Jack
COUPLING	Off-Road Recovery Coupling at Rear

TANK

MATERIAL	UV - Stabilised Polyethylene Also available in Aluminium
MAX. CAPACITY	1 x 14000L Polyethylene Tank
BAFFLE SYSTEM	Ball-Baffle System, BBS Tested and Approved by Loadsafe Australia 1 Ball Every 40 Litres
TANK FINISH	Lightweight, Increased Payload Food Grade Poly Corrosion Resistant Flex and Impact Resistant
TANK FEATURES	15-Year Tank Warranty Heavy Duty Tank Mounts Low Profile Tank Design Water Level Sight Gauge

ELECTRICAL SYSTEM

HARNESS AND WIRING	Marine Grade MDG15 Harness Compliant Braiding
CONTROLS	Individually Programmed 16 Channel Remote Control
POWER	Battery with Individual Battery Lockout Isolator
LIGHTING	Hella LED Lights Rear Beacon

WATER SPRAY SYSTEM

BATTERY SPRAYS	2 x 80mm (3") Left And Right Rear 1 x 80mm (3") Center Rear
SPRAY BAR	Pressure Fed V-jet Bar With 14 Brass V-Jet Nozzles With End Caps
HOSE REEL	Heavy Duty Manual Rewind Hose Reel
OUTLETS	1 x 80mm (3") Pump Outlet 1 x Garden Tap Outlet
TANK-FILL	1 x 80mm (3) Pump with One-Way Swing Check Valve
ACTUATORS	Electric Over Air with Spring Return Close Valves Air Connection Required

WATER PUMP AND DRIVE SYSTEM

MODEL	Heavy Duty Self Priming GMP Pump
PERFORMANCE	1,800 LPM @ 65 PSI with 45 Metre Head
ENGINE	Honda Petrol 13HP Electric Start Engine
DRIVE SYSTEM	Direct Coupled Mechanical Drive



TRAILER DIMENSIONS

CAPACITY |
 WHEELBASE |
 GVM |
 TARE WEIGHT |
 LENGTH |
 WIDTH |
 HEIGHT

Dimensions confirmed during design stage



PREMIUM QUALITY
BUILT TO LAST



SAFE AND COMPLIANT
FOR PEACE OF MIND



CUSTOMIZABLE
TO SUIT YOUR NEEDS



AUSTRALIAN MADE
FOR AUSTRALIAN CONDITIONS

COMPLIANCE CERTIFICATIONS: Back-Flow Certification AND Risk Assessment are completed as part of the Allquip's quality assurance. For a wide range of options, contact our Allquip sales team.



TRAILER SPECS

MODEL	PT-16000 Dog Trailer
CHASSIS	Fully Fabricated 16mm Top Flange & 20mm Bottom Flange
DRAW BAR	A-frame Heavy-duty steel construction
TOWING EYE	50 mm towing eye
AXLES	3 x FUWA Hitch 20" Drum Brakes 10/285 PCD Long Studs
SUSPENSION	FUWA K Hitch 1232mm Bogie-Axle Overslung Spring 9 Leaf
RIDE HEIGHT	385mm
OUTER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD
INNER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD

TYRES	9 x 275/70R x 22.5"
MUDGUARD	2 x Conveyer Rubber Guards
COATING	Fully Sandblasted with Polyzinc Undercoat & Powder Coat Topcoat
COLOR	Black
LIGHTS	LED Hella Trailer Light Kit
TOOLBOX	1200mm x 450mm x 380mm
SPARE WHEEL	Semi Trailer Swing Type
LANDING JACK	Butler Side Wind Implement Jack
COUPLING	Off-Road Recovery Coupling at Rear

TANK

MATERIAL	UV - Stablised Polyethylene Also available in Aluminium
MAX. CAPACITY	1 x 16000L Polyethylene Tank
BAFFLE SYSTEM	Ball-Baffle System, BBS Tested and Approved by Loadsafe Australia 1 Ball Every 40 Litres
TANK FINISH	Lightweight, Increased Payload Food Grade Poly Corrosion Resistant Flex and Impact Resistant
TANK FEATURES	15-Year Tank Warranty Heavy Duty Tank Mounts Low Profile Tank Design Water Level Sight Gauge

ELECTRICAL SYSTEM

HARNESS AND WIRING	Marine Grade MDG15 Harness Compliant Braiding
CONTROLS	Individually Programmed 16 Channel Remote Control
POWER	Battery with Individual Battery Lockout Isolator
LIGHTING	Hella LED Lights Rear Beacon

WATER SPRAY SYSTEM

BATTERY SPRAYS	2 x 80mm (3") Left And Right Rear 1 x 80mm (3") Center Rear
SPRAY BAR	Pressure Fed V-jet Bar With 14 Brass V-Jet Nozzles With End Caps
HOSE REEL	Heavy Duty Manual Rewind Hose Reel
OUTLETS	1 x 80mm (3") Pump Outlet 1 x Garden Tap Outlet
TANK-FILL	1 x 80mm (3) Pump with One-Way Swing Check Value
ACTUATORS	Electric Over Air with Spring Return Close Valves Air Connection Required

WATER PUMP AND DRIVE SYSTEM

MODEL	Heavy Duty Self Priming GMP Pump
PERFORMANCE	1,800 LPM @ 65 PSI with 45 Metre Head
ENGINE	Honda Petrol 13HP Electric Start Engine
DRIVE SYSTEM	Direct Coupled Mechanical Drive

TRAILER DIMENSIONS

CAPACITY	WHEELBASE	GVM	TARE WEIGHT	LENGTH	WIDTH	HEIGHT
----------	-----------	-----	-------------	--------	-------	--------

Dimensions confirmed during design stage



TRAILER SPECS

MODEL	PT-22000 Super Dog Trailer
CHASSIS	Fully Fabricated 16mm Top Flange & 20mm Bottom Flange
DRAW BAR	A-frame Heavy-duty steel construction
TOWING EYE	50 mm towing eye
AXLES	4 x FUWA Hitch 20" Drum Brakes 10/285 PCD Long Studs
SUSPENSION	FUWA K Hitch 1232mm Bogie-Axle Overslung Spring 9 Leaf
RIDE HEIGHT	385mm
OUTER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD
INNER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD



TANK

MATERIAL	UV - Stablised Polyethylene Also available in Aluminium
MAX. CAPACITY	2 x 11000L Polyethylene Tanks
BAFFLE SYSTEM	Ball-Baffle System, BBS Tested and Approved by Loadsafe Australia 1 Ball Every 40 Litres
TANK FEATURES	Lightweight, Increased Payload Food Grade Poly Corrosion Resistant Flexible and Impact Resistant 15-Year Tank Warranty Heavy Duty PIN Mounts Low Profile Tank Design Water Level Sight Gauge Presure Relief Valve



WATER PUMP AND DRIVE SYSTEM

MODEL	Heavy Duty Self Priming GMP Pump
PERFORMANCE	2,300 LPM @ 46 PSI with 32 Metre Head
ENGINE	Kohler Diesel 19HP Electric Start Engine
DRIVE SYSTEM	Flexible Type Coupling Drive



TRAILER DIMENSIONS

CAPACITY | WHEELBASE | GVM | TARE WEIGHT | LENGTH | WIDTH | HEIGHT

Dimensions confirmed during design stage

TYRES	13 x 275/70R x 22.5"
MUDGUARD	Conveyer Rubber Guards
COATING	Fully Sandblasted with Polyzinc Undercoat & Powder Coat Topcoat
COLOR	Black
LIGHTS	LED Hella Trailer Light Kit
TOOLBOX	1200mm x 450mm x 380mm
SPARE WHEEL	Semi Trailer Swing Type
LANDING JACK	Butler Side Wind Implement Jack
COUPLING	Off-Road Recovery Coupling at Rear



ELECTRICAL SYSTEM

HARNESS AND WIRING	Marine Grade MDG15 Harness Compliant Braiding
CONTROLS	Individually Programmed Remote Control
POWER	Battery with Individual Battery Lockout Isolator
LIGHTING	Hella LED Lights Rear Beacon



WATER SPRAY SYSTEM

BATTERY SPRAYS	2 x 80mm (3") Left And Right Rear 1 x 80mm (3") Center Rear
SPRAY BAR	Pressure Fed V-Jet Bar With 14 Brass V-Jet Nozzles With End Caps
HOSE REEL	Heavy Duty Manual Rewind Hose Reel
OUTLETS	1 x 80mm (3") Pump Outlet 1 x Garden Tap Outlet
TANK-FILL	1 x 80mm (3) Pump with One-Way Swing Check Value
ACTUATORS	Electric Over Air with Spring Return Close Valves Air Connection Required



PREMIUM QUALITY
BUILT TO LAST



SAFE AND COMPLIANT
FOR PEACE OF MIND



CUSTOMIZABLE
TO SUIT YOUR NEEDS



AUSTRALIAN MADE
FOR AUSTRALIAN CONDITIONS

COMPLIANCE CERTIFICATIONS: Back-Flow Certification AND Risk Assessment are completed as part of the Allquip's quality assurance. For a wide range of options, contact our Allquip sales team.



TRAILER SPECS

MODEL	PT-28000 Super Dog Trailer
CHASSIS	Fully Fabricated 16mm Top Flange & 20mm Bottom Flange
DRAW BAR	A-frame Heavy-duty steel construction
TOWING EYE	50 mm towing eye
AXLES	4 x FUWA Hitch 20" Drum Brakes 10/285 PCD Long Studs
SUSPENSION	FUWA K Hitch 1232mm Bogie-Axle Overslung Spring 9 Leaf
RIDE HEIGHT	385mm
OUTER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD
INNER RIMS	22.5" x 8.25" 10 Stud Steel 285 PCD

TANK

MATERIAL	UV - Stabilised Polyethylene Also available in Aluminium
MAX. CAPACITY	2 x 14000L Polyethylene Tanks
BAFFLE SYSTEM	Ball-Baffle System, BBS Tested and Approved by Loadsafe Australia 1 Ball Every 40 Litres
TANK FEATURES	Lightweight, Increased Payload Food Grade Poly Corrosion Resistant Flexible and Impact Resistant 15-Year Tank Warranty Heavy Duty PIN Mounts Low Profile Tank Design Water Level Sight Gauge Pressure Relief Valve

WATER PUMP AND DRIVE SYSTEM

MODEL	Heavy Duty Self Priming GMP Pump
PERFORMANCE	2,300 LPM @ 46 PSI with 32 Metre Head
ENGINE	Kohler Diesel 19HP Electric Start Engine
DRIVE SYSTEM	Flexible Type Coupling Drive



TRAILER DIMENSIONS

CAPACITY	WHEELBASE	GVM	TARE WEIGHT	LENGTH	WIDTH	HEIGHT
28,000 litres	mm	kg	kg	mm	mm	mm

TYRES	13 x 275/70R x 22.5"
MUDGUARD	Conveyer Rubber Guards
COATING	Fully Sandblasted with Polyzinc Undercoat & Powder Coat Topcoat
COLOR	Black
LIGHTS	LED Hella Trailer Light Kit
TOOLBOX	1200mm x 450mm x 380mm
SPARE WHEEL	Semi Trailer Swing Type
LANDING JACK	Butler Side Wind Implement Jack
COUPLING	Off-Road Recovery Coupling at Rear

ELECTRICAL SYSTEM

HARNESS AND WIRING	Marine Grade MDG15 Harness Compliant Braiding
CONTROLS	Individually Programmed Remote Control
POWER	Battery with Individual Battery Lockout Isolator
LIGHTING	Hella LED Lights Rear Beacon

WATER SPRAY SYSTEM

BATTERY SPRAYS	2 x 80mm (3") Left And Right Rear 1 x 80mm (3") Center Rear
SPRAY BAR	Pressure Fed V-Jet Bar With 14 Brass V-Jet Nozzles With End Caps
HOSE REEL	Heavy Duty Manual Rewind Hose Reel
OUTLETS	1 x 80mm (3") Pump Outlet 1 x Garden Tap Outlet
TANK-FILL	1 x 80mm (3) Pump with One-Way Swing Check Valve
ACTUATORS	Electric Over Air with Spring Return Close Valves Air Connection Required



PREMIUM QUALITY
BUILT TO LAST



SAFE AND COMPLIANT
FOR PEACE OF MIND



CUSTOMIZABLE
TO SUIT YOUR NEEDS



AUSTRALIAN MADE
FOR AUSTRALIAN CONDITIONS

COMPLIANCE CERTIFICATIONS: Back-Flow Certification AND Risk Assessment are completed as part of the Allquip's quality assurance. For a wide range of options, contact our Allquip sales team.