


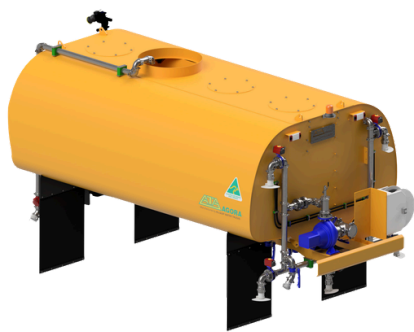

CHASSIS VARIANTS

BRAND	MODEL	RATED PAYLOAD CAPACITY	CHASSIS WEIGHT	ESTIMATED OPERATING WEIGHT	LENGTH (A)	WIDTH	HEIGHT (B)
KOMATSU	HM300-5	28,000	21,595	50,395	10,913	3,100	3,865
VOLVO	A30G	29,000	19,400	48,200	10,976	3,100	3,890
CAT	725	27,760	19,350	48,150	11,071	3,100	3,763

TANK

MATERIAL	Heavy-Duty Press-Formed Steel
MAX. CAPACITY	23,000 Litres
BAFFLE SYSTEM	3 x Cross Way Baffle Walls and 2 x Longitudinal Baffle Wall for Maximum Stability
TANK FEATURES	All Surfaces Grit Blasted External 2-Pack Primed & Polyurethane Top Coat Internal Polyamide Cured Epoxy Mastic Coat Speed Liner Applied To Underside Low Centre of Gravity Design Integrated Drain Sump Australian Designed & Manufactured Four Heavy-Duty Lifting Lugs Integrated Internal Overflow System

WATER PUMP AND DRIVE SYSTEM

MODEL	125x100x250 Water Pump Hydraulic Drive - Closed Couple
PERFORMANCE	3500 LPM @ 130 PSI with 90 Metre Head
HYDRAULIC SYSTEM	Engineered Hydraulic System Utilising the Truck Hoist Circuit
OIL COOLER	Hydraulic Oil Cooling Plate Heat Exchanger



MODULE DIMENSIONS

CAPACITY	MODULE WEIGHT	LENGTH	WIDTH	HEIGHT
23,000 litres	5,800 kg	5,620 mm	3,100 mm	2,350 mm

ELECTRICAL SYSTEM

HARNESS AND WIRING	Marine Grade MDG15 Harness
CONTROLS	In-Cab Electric Over Hydraulic Controls
LIGHTS	Hella LED Lights 2 x LED Tail Lights 1 x Rear Beacon 1 x Rear Work Light
REVERSE ALARM	OEM Reverse alarm

WATER SPRAY SYSTEM

BATTERY SPRAYS	2 x 80mm (3") Left and Right Rear 1 x 80mm (3") Center Rear 2 x 80mm High Left and Right Rear
CANNON	Elkhart Nitro HD (2.5") Water Cannon 8 x Way In-Cab Joystick With Adjustable Nozzle Control 334° Horizontal x 135° Vertical Range
HOSE REEL	Heavy Duty Spring Rewind Hose reel
OUTLETS	1 x 80mm (3") Pump Outlet 1 x Tap Outlet
TANK-FILL	1 x 80mm (3) Pump with One-Way Swing Check Valve 1 x Large Overhead Fill Funnel
ACTUATORS	Electric Over Hydraulic Actuators On All Sprays

